

APPLICATION INSTRUCTIONS:

NOTE: The DynaBlack RTV Sealant contained in this kit is to be used to seal the ends of your bulkhead connections preventing moisture from creating corrosion on terminal to terminal connections. Please take extreme care in the application and use of this material as it is very messy. We strongly suggest that nitrile, latex or similar protective gloves be worn during application to keep your skin from coming in contact with the RTV Sealant.

This kit contains: (1) 1oz. tube of DynaBlack RTV sealant; (1) cotton tipped applicator stick; (1) application instruction sheet.




1. Place a sheet of paper towel or cardboard down to the area where you intend to work. Cut off the small applicator tip end of the packet, and apply the RTV sealant onto the connector as shown above.




2. Apply the sealant until you have covered all of the ends of each of the terminals and cavities.



3. Once you have completed applying the sealant, set the tube down onto your working surface. Use the cotton tipped applicator stick to work the sealant into the cavities.

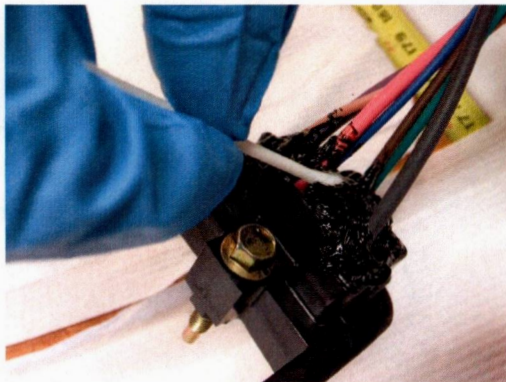

4. After working the sealant into the cavities, begin smoothing it out to give it a cleaner, more finished appearance. If you need to apply additional sealant, that is OK.

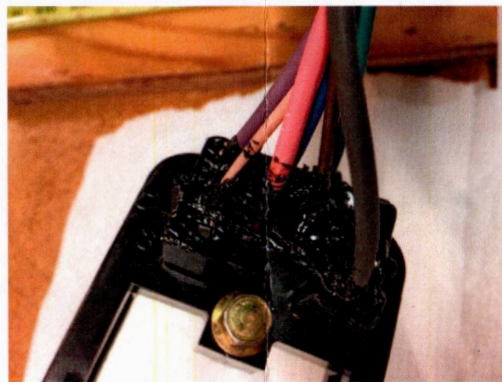

5. Your finished application should show no openings. Hold the connector up to light to see if there are any voids and touch them up.



**American
Autowire**

www.americanautowire.com 856-933-0801

PART #

92973920

DESCRIPTION:

**DynaBlack RTV Sealant
Application
Instruction Sheet**

92973921 instruction sheet rev 0.0 6/28/2023